

Temperature probe with Pt 100 Ω sensor TS 11

- Sensor Pt 100 Ω at 0 °C
- Range from -50 to +250 °C
- Stem and fitting in AISI 316 L
- Head in aluminum alloy or in plastic

REFERENCE TABLE

Model

Fitting

- 0 None
- 1 BSP 1/2"
- 2 NPT 1/2"

Stem material

- I AISI 316 L

Stem length

- xxx 50 ... 999 mm

Stem O.D.

- 06 6 mm (length max. 500 mm)
- 08 8 mm (length max. 800 mm)
- 10 10 mm (length max. 999 mm)

Sensor

- 3 Simplex 3 wires
- 4 Simplex 4 wires
- 6 Duplex 2 x 3 wires

Accuracy

- A Class A
- B Class B

Connection




- C Ceramic terminal box
- T 4-20 mA Transmitter

Head

- DB In aluminum alloy
- PVC In PVC
- PP In PP

TS 11 1 I 250 08 4 A T DB

(Example)

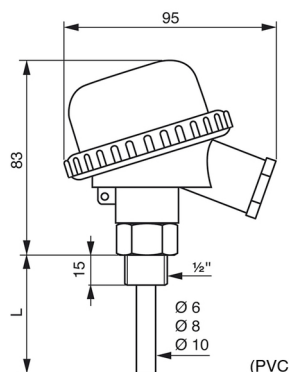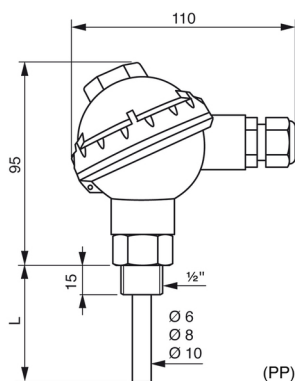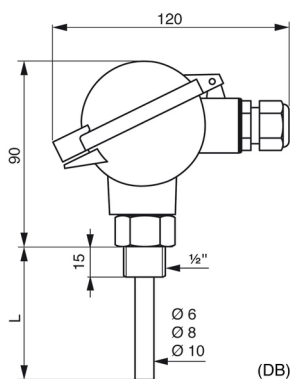

BAMO INTERNATIONAL

22, Rue de la Voie des Bans · Z.I. de la gare · 95100 ARGENTEUIL

Tel +33 (0)1 30 25 83 20 Web www.bamo.eu

Fax +33 (0)1 34 10 16 05 E-mail export@bamo.fr

Temperature probe with Pt
100 Ω sensor
TS 11

22-06-2018

D-611.01-EN-AB

TE

611-01 /1