

Electrically actuated butterfly valves VEP K4-PPH



- ND 65 to ND 200
- In-line pattern
- Electric actuator, Position index
- Manual operating for immediate action

APPLICATIONS

Electrically actuated butterfly valves are useful to stop the flow of fluids in part of a plant. Opened they do not induce pressure drop.

These models in plastics are designed for aggressive liquids.

Assistance with manual operating for maintenance or emergency operations (*actuator power supply is switched off before a manual operating*).

TECHNICAL FEATURES

Valve materials

Body:	GF PP
Butterfly:	PPH
Seals:	EPDM or FPM
Process connections:	Between flange (<i>Wafer</i>)
Pressure:	10 bar as maxima

90° electric actuator

Power:	45W
Duty rating:	30% (ND 65 ... ND 100), 50% (ND 150 ... ND 200)

ND 65 ... ND 100

Movement:	10...15s
Protection:	IP65
Wiring:	1 cable gland ISO M20 DIN 43650 plug; 3 wire + earth
Main power input:	90...240 V AC 50/60 Hz and 90...350 V DC 24 V AC 50/60 Hz and 24 V DC

ND 150

Movement:	30s
Protection:	IP67
Wiring:	2 cable gland ISO M20
Main power input:	90...240 V AC 50/60 Hz and 90...350 V DC 15...30 V AC 50/60 Hz, -/+ 12...48 V DC

ND 200

Movement:	60s
Protection:	IP67
Wiring:	2 cable gland ISO M20
Main power input:	90...240 V AC 50/60 Hz and 90...350 V DC 15...30 V AC 50/60 Hz, -/+ 12...48 V DC

OPTIONS *Upon request*

CODE NUMBERS AND REFERENCES

		24 V AC and 24 V DC (DN 65 ... DN 100) 15 V AC and 48 V DC (DN 150 and DN 200)		90 ... 240 V AC and 90 ... 350 V DC	
d	DN	EPDM seals	FPM seals	EPDM seals	FPM seals
75	65	914 397	914 402	914 407	914 412
90	80	914 398	914 403	914 408	914 413
110	100	914 399	914 404	914 409	914 414
160	150	914 400	914 405	914 410	914 415
225	200	914 401	914 406	914 411	914 416

BAMO MESURES

22, Rue de la Voie des Bans - Z.I. de la Gare - 95100 ARGENTEUIL

Tél : (+33) 01 30 25 83 20 - Web : www.bamo.fr

Fax : (+33) 01 34 10 16 05 - E-mail : info@bamo.fr

Electrically actuated
butterfly valves

VEP K4-PPH

29-11-2011


914 I1 06 A

PLAS

914-06/1

914

DIMENSIONS

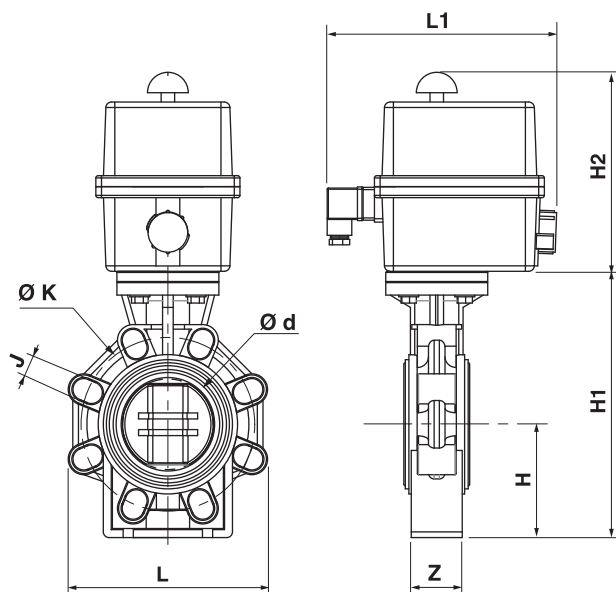


ND	d	H	H1	H2	L	L1	Z	K	J
65	75	100	232	177	133	205	46	127 / 145	19
80	90	100	239	177	176	205	49	146 / 160	19
100	110	115	269	177	206	205	56	175 / 190.5	19
150	160	148	333	258	261	275	70	234.5 / 241.5	23
200	225	175	395	258	314	275	71	290 / 298.5	23

Mounting flange torques

ND	65	80	100	150	200
Nm	15	18	20	40	55

OPERATING FEATURES


Pressure loss vs. Flow diagram [water at 20°C]

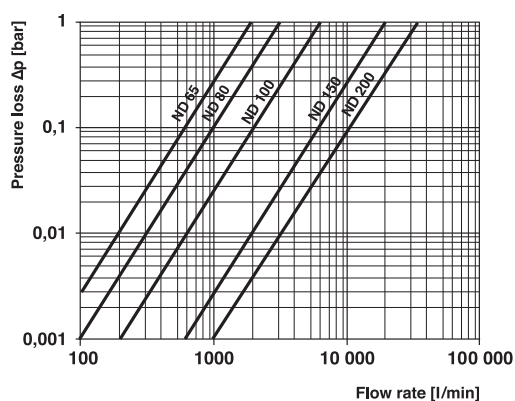


Kv value table

	Pressure loss	
	1 bar	0.001 bar
ND 65	1900 l/min	60 l/min
ND 80	3100 l/min	100 l/min
ND 100	6000 l/min	190 l/min
ND 150	19000 l/min	600 l/min
ND 200	35000 l/min	1100 l/min

Pressure vs. temperature diagram

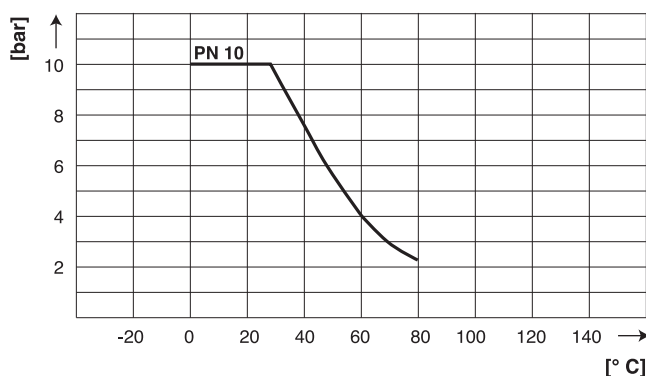

Flow characteristic

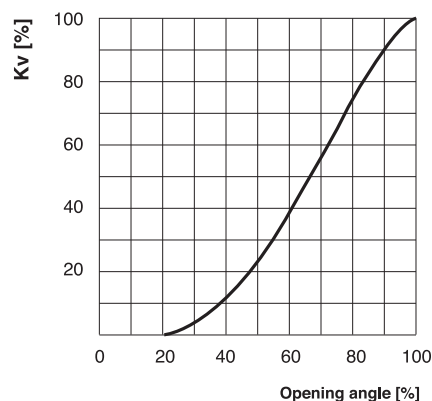

BAMO MESURES

22, Rue de la Voie des Bans - Z.I. de la Gare - 95100 ARGENTEUIL

Tél : (+33) 01 30 25 83 20 - Web : www.bamo.fr

Fax : (+33) 01 34 10 16 05 - E-mail : info@bamo.fr

Electrically actuated
butterfly valves

VEP K4-PPH

29-11-2011

914 I1 06 A

PLAS

914-06/2